


Mover

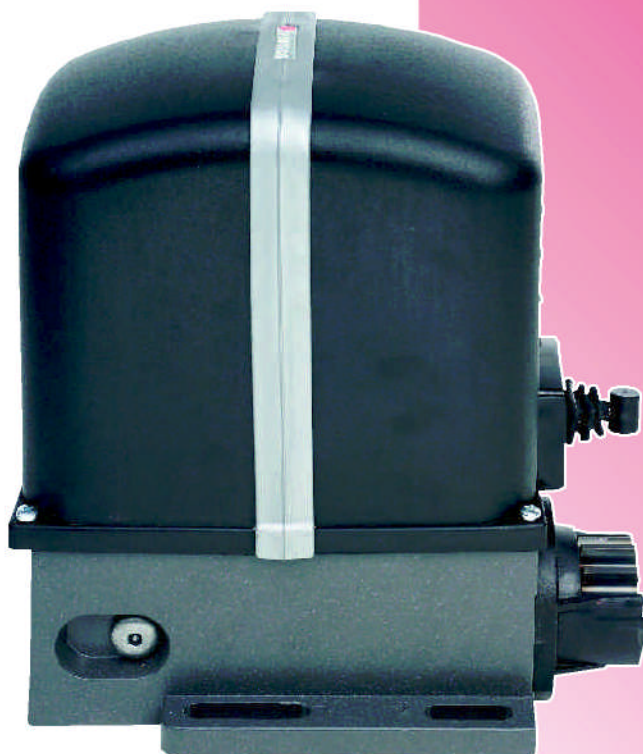

Electromechanical irreversible gearmotor for domestic sliding gates up to 1500 Kg

Elegant and user-friendly thanks to the harmonious design and to the easy access to the control panel lodged into the center

Silent and reliable, the sturdy aluminium base and the high quality gearings assure long lasting performances in any weather situation. An adjustable fixing plate allows quick and careful fitting

MODELS AND ACCESSORIES

MOVER 4

Gearmotor for sliding gates up to 400Kg, 12Vdc

MOVER 5

Gearmotor for sliding gates up to 500Kg, available in 230V e 110V

MOVER 8

Gearmotor for sliding gates up to 800Kg, available in 230V e 110V

MOVER 15

Gearmotor for sliding gates up to 1500Kg, available in 230V e 110V

MOVER 15T

Triphase gearmotor for sliding gates up to 1500Kg, power supply 380V

Available also in 12Vdc for gates up to 400 Kg with possible housing of back-up battery in case of power cut.



B102

Galvanized steel rack
M4 12x30x1000mm.
Complete with screws and bolts



B104

PVC rack
M4 20x26x1000mm. Complete
with screws and bolts



B108

PVC rack with metal bearing
M4 20x26 mm in 50cm bars.
Complete with screws and bolts




MOVER KIT 230V

MOVER KIT 12V


- 1 MOVER gearmotor complete with Q60S control panel, radio receiver 433,92 Mhz
- 1 RF36 security photocells
- 1 RS15 key switch
- 1 RL11 blinker 24Vdc
- 2 HIT transmitters 3 channels
- 4 meters rack B108
- Fixing brackets and instructions




- 1 MOVER gearmotor complete with Q25 control panel, radio receiver 433,92 Mhz
- 1 RF36 security photocells
- 1 RS15 key switch
- 1 RL09 blinker 12Vdc
- 2 HIT transmitters 3 channels
- 1 back-up battery 12Vdc -4A
- 4 meters rack B108
- Fixing brackets and instructions

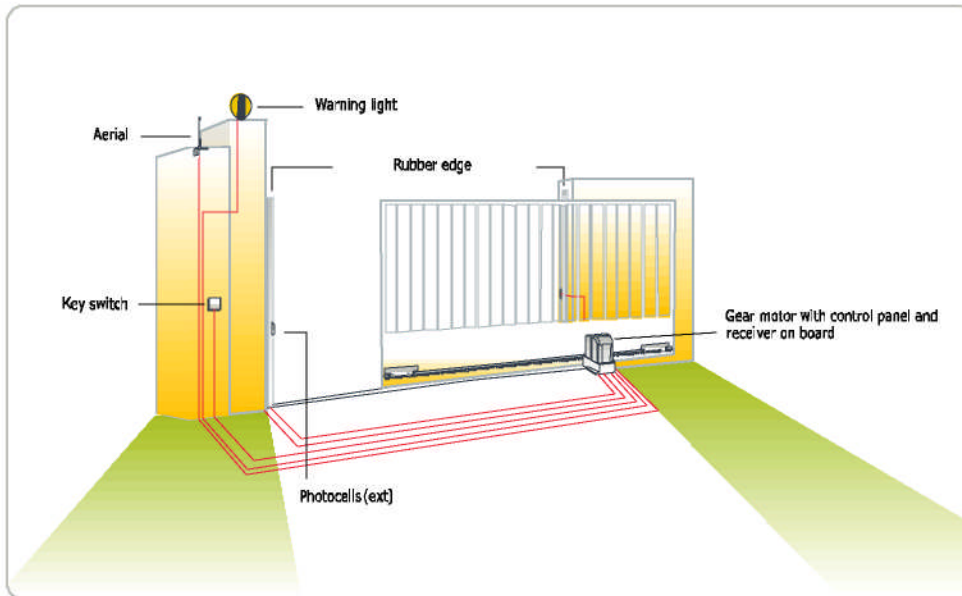

years of warranty

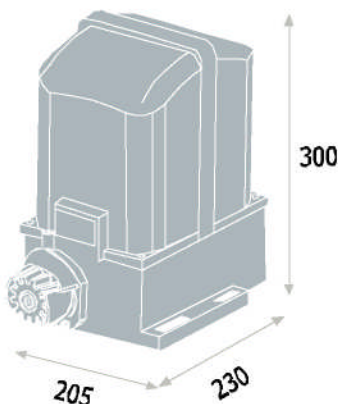

**MOVER
Z12
M4**

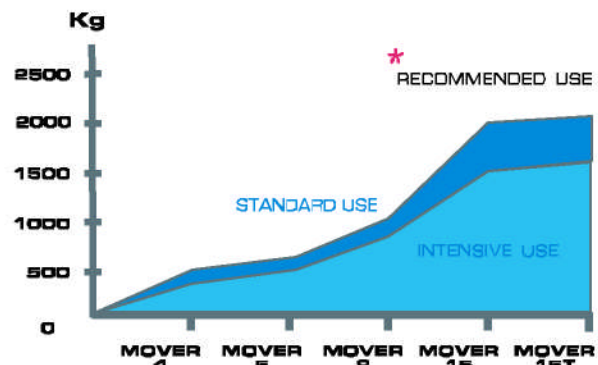

The type and the shape of the gate might reduce, even importantly, the above mentioned data.

TECHNICAL FEATURES

	230V				380V 12V				110V			
	MOVER 5	MOVER 8	MOVER 15	MOVER 15T	MOVER 4	MOVER 5	MOVER 8	MOVER 15	MOVER 4	MOVER 5	MOVER 8	MOVER 15
Power supply	230V ~ 50 Hz				380V				12Vdc			
Absorption	1,2 - 1,7 A	1,2 - 2 A	3 A	1,3 A	0,7 - 9,5 A	2 - 3,5 A	2,2 - 4 A	6,5 A	110V ~ 60 Hz			
Motor power	250W	300W	600W	600W	40W	280W	330W	600W				
Capacitor	8µ	10µ	20µ	---	---	30µ	30µ	60µ				
Thermic protection	150°				150°				150°			
Maximum thrust	350N	440N	550N	600N	270N	380N	460N	600N				
IP level	54				54				54			
Revolutions speed	1400 g/m				1400 g/m				1700 g/m			
Working temperature	-35°-+55°				-35°-+55°				-35°-+55°			
Maximum gate's weight	500 Kg	800 Kg	1500 Kg	1500 Kg	400 Kg	500 Kg	800 Kg	1500 Kg				
Sliding speed	8,5m/min				8,5m/min				10m/min			
Duty cycle	40%				40%				40%			

25 Crescent Place, Clontarf, Dublin 3, Ireland.
 Telephone +353 (0) 1 833 3168 Fax +353 (0) 1 833 5841
 E-Mail: info@adg.ie Web: www.adg.ie

