

# Park plus

Automatic road barrier for openings up to 6 meters





Highly versatile: the boom can be installed both on right or left side according to the needed opening

Built-in pre-wired control panel, with adjustable force and deceleration

Shell in galvanized steel and painted aluminium panels. Adjustable balance spring system. Quick access to the emergency release with key and safety micro-switch

## TECHNICAL FEATURES

	PARK PLUS 3	PARK PLUS 4	PARK PLUS 6
Power supply	230V~50Hz		
Absorption	1,5 A	1,2 A	
Motor power	250W	200W	
Capacitor	16µ	10µ	
IP level	54		
Working temperature	-20° - +55°		
Opening time	3,5	8	10
Maximum boom	3 m	4 m	6 m
Boom diameter	8x20x1,2	8x30x2 mm	
Duty cycle	70%		
Control panel	Q60S		

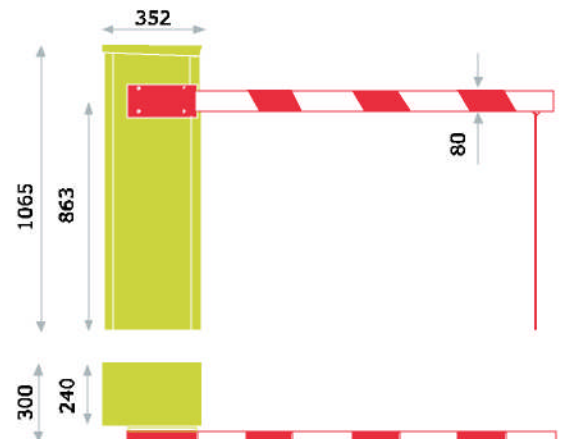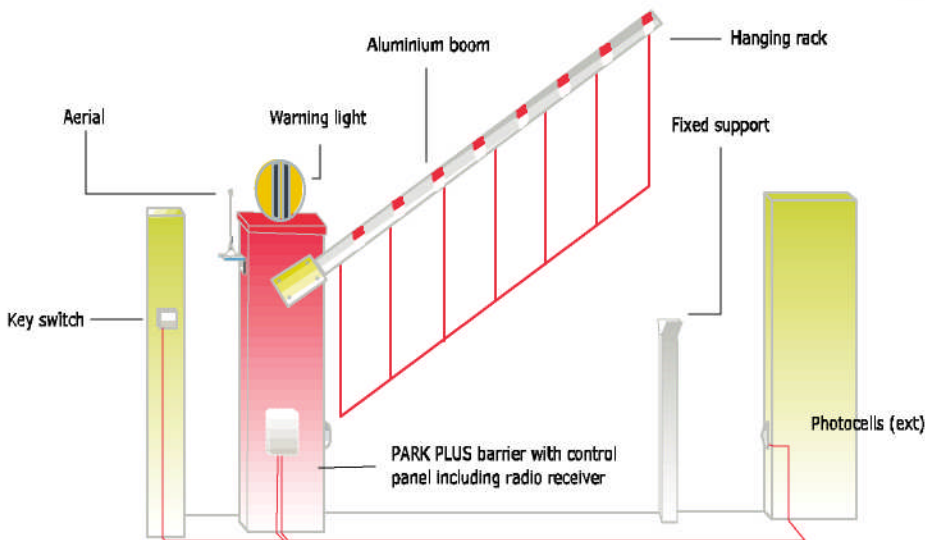

## MODELS AND ACCESSORIES

### G105

Moving support

### G106

Fixed support

### G107

Hanging rack (2m). For PARK Plus 4 and PARK Plus 6 only

### G108

180° articulated device

### G109

Bedplate

years of warranty



3

25 Crescent Place, Clontarf, Dublin 3, Ireland.  
 Telephone +353 (0) 1 833 3168 Fax +353 (0) 1 833 5841  
 E-Mail: [info@adg.ie](mailto:info@adg.ie) Web: [www.adg.ie](http://www.adg.ie)

